

Soldering type 15-contacts female connector with a housing for cables


RMC-E15F4S-LC5-M() ()

For mobile interfaces

Vertical Housing for Cables

Soldering


Conforming to PCMCIA/JEITA

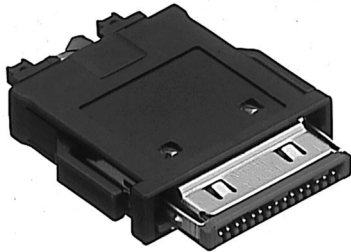

● Configuration of product Part No.

RMC- E 15 F4S- LC5- M () ()

- | | |
|--|--|
| ① Series name | ⑦ Form of polarization keys:
A: A type, B: B type, C: C type |
| ② E: EMI-filtered | Locations of polarization keys:
12: 12, 13: 13, 23: 23, Key-less |
| ③ No. of contacts: 15 | (C type: 1: 1, 2: 2, 12: 12, Key-less) |
| ④ F4S: Soldering type, female, for thin wire (AWG#30, #32) | ⑧ Insulator colors |
| ⑤ LC5: Forms of housings, Outside diameter of cable is 3 - 3.5 mm. | Applicable only to models with the MB form of key (For the models with other key forms, these insulator colors are all black.) |
| ⑥ M: Forms of keys are one-piece mold types. | None: Brown (standard)
BK : Black |

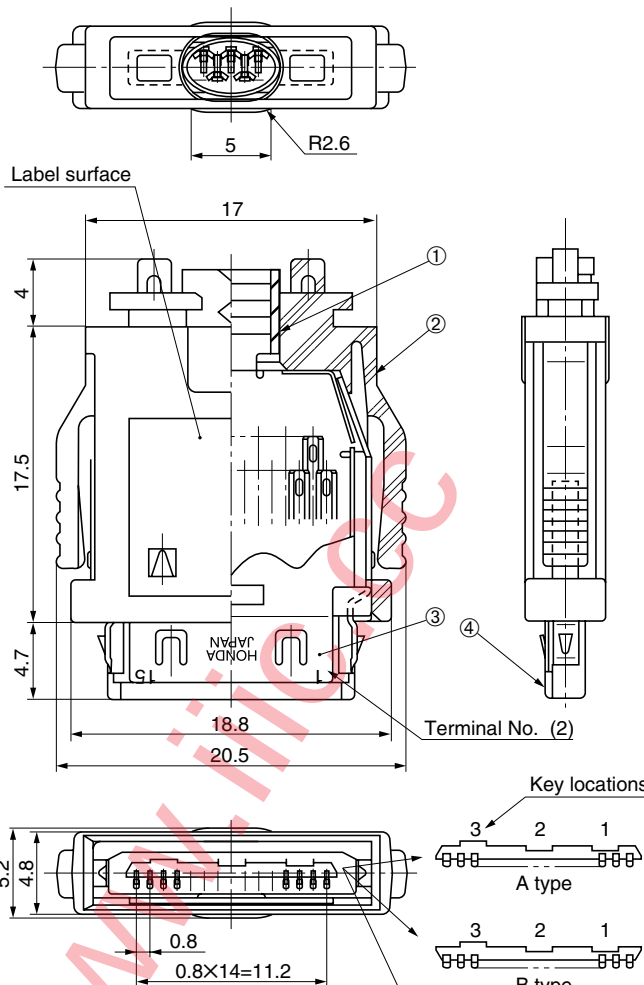

	Forms of keys
A type	
B type	
C type	

● Components

- | | |
|---|------------------|
| ① | Metal cover A |
| ② | Cable cover |
| ③ | Metal cover B |
| ④ | Female connector |

- Use of AWG#28 or #30 is recommended. (For use of other AWG#, consult the dealer.)
- After soldering, cover the soldered area with insulation such as shrink tube.
- The outside diameters of the cables are shown here only for reference. This model may be not applicable to some type of cables.
- The color of the housing is black.
- This model requires a bushing for assembly with a cable harness. For the form of the bushing area, because there is reference figure, inquire.
- Some models may not be quickly supplied depending on the configuration of part number (key position). For the availability of the model required consult your supplier.

● Locations of polarization keys

Part No.	Key location	Identification Examples	Mating connectors
RMC-E15F4S-LC5-M()	—	A	RMC-E(A)15MY-OM()-M(), etc.
RMC-E15F4S-LC5-M()12	12	A12	RMC-E(A)15MY-OM()-M()3, etc.
RMC-E15F4S-LC5-M()23	23	A23	RMC-E(A)15MY-OM()-M()1, etc.
RMC-E15F4S-LC5-M()13	13	A13	RMC-E(A)15MY-OM()-M()2, etc.